



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Rec'd PCT/PTO 14 APR 2005

PCT/IB 03 / 0 3 9 2 8

12.09.03

10/531613

MAILED 19 SEP 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079333.7

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Best Available Copy



Anmeldung Nr:
Application no.: 02079333.7
Demande no:

Anmeldetag:
Date of filing: 18.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Display device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G09G/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

16.10.2002

Display device

EPO - DG 1
18.10.2002
(108)

The invention relates to a display device for displaying subsequent images comprising a plurality of display elements with an electrophoretic medium.

Electrophoretic display devices are based on the motion of charged, usually color particles under the influence of an electric field between two extremes states having a different transmissivity or reflectivity. With these displays devices, dark (coloured) characters can be imaged on a light (coloured) background, and vice versa.

Display devices of this type are used in, for example, monitors, laptop computers, personal digital assistants (PDA's), mobile telephones and electronic books.

A display device of the type mentioned in the opening paragraph is described in the unpublished international patent application IB02/00611. This patent application describes a electronic ink display comprising two substrates, one of which is transparent, the transparent substrate is provided with row and columns electrodes. A crossing between a row and a column electrode is associated with a display element. The display element is coupled to the column electrode via a thin film transistor (TFT), the gate of which is coupled to the row electrode. This arrangements of display elements, TFT transistors and row and column electrode together forms an active matrix. Furthermore, the display element comprises a first electrode, a second electrode and a third electrode. A row driver may select the first electrodes of the display elements via thin-film transistors whose gate electrodes are connected to the row electrodes and whose source electrodes are connected to the column electrodes. The data signal on the first column electrode is transferred to the first electrode via the TFT coupled with the drain electrode. Furthermore, in each display element the second electrode is connected to additional drive means via an additional TFT and an additional column electrode for receiving a second data voltage for realizing the intermediate optical state. The third electrode is connected to, for example, ground by means of one or more common counter electrodes. Furthermore, an electronic ink is provided between the first electrodes, the second electrode and the common electrode. The electronic ink comprises multiple microcapsules, of about 10 to 100 microns. Each microcapsule comprises positively

charged black particles suspended in a white fluid. When a positive voltage V is applied to the first electrode and the second electrode, the black particles move to the side of the microcapsule directed to the lowest potential in this case the third electrode. In case the display device is viewed from the side of the transparent substrate comprising the first and second electrode the display now has the color of the fluid, in this case white. To obtain an intermediate optical state, for example, the second electrode is now connected to ground, while the first electrode is connected to a negative voltage V^- and the third electrode is connected to ground. The positively charged black particles move to the lowest potential, in this case an area around the first electrode. When the display device is viewed from side of the transparent substrate the display element has only partly the color of the black particles and partly the color of the fluid. A greyvalue is thereby obtained. Intermediate optical states, grey scales, can be created in the display device by controlling the amount of particles that move to the first and second electrode at the top of the microcapsules. For example, by controlling the electric field lines between the first electrodes, the second electrodes and the third electrode, more or fewer particles move towards the area between the first and second electrodes and different intermediate optical states (greyvalues) can be obtained.

In the known display devices it is required in order to improve the reproducibility of the intermediate optical states by bringing the pixel to a defined state prior to selection, for example by giving a reset pulse which causes the charged particles to spread uniformly across the third electrode in advance. A disadvantage of the known display is that this reset pulse results in a temporary blanking of the screen and is incompatible with slow video reproduction.

It is an object of the invention to provide a display device of the type mentioned in the opening paragraph which don't have a temporary blanking.

To achieve this object, a first aspect of the invention provides a display device as specified in Claim 1.

The invention is based on the recognition that particles realizing the intermediate optical state of information to be displayed, should be removed from the areas between the first and the second electrode when realizing a subsequent intermediate state of the subsequent image, so that substantially no remaining particles can influence the intermediate optical state of the subsequent image.

Using two groups of particles with the same color but with a first group of positively charged particles and a second group of negative charged particles enables that by supplying appropriate voltages to the electrodes no reset pulses are required between subsequent images. When appropriate voltages are supplied to the pixel electrodes particles of the first group move to an area between the first and the second electrode in accordance with the desired intermediate optical states and particles of the second group move to the third electrode. In a next subsequent image the voltages supplied to the electrodes can be selected such that the particles of the first group are released from the area between the first and second electrode and the particles of the second group move to the area between the first and the second electrode in accordance with the intermediate optical states of the second subsequent image.

A particular embodiment of the invention is specified in claim 2 by alternating the groups of charged particles forming the intermediate optical state, reset pulses are not required anymore, so temporarily blanking of the display is substantially eliminated.

Further advantageous embodiments of the invention are specified in the further dependent claims.

In an embodiment as specified in claim 3 reproducibility can be further improved by supplying a preset signal before the drive signal. In this embodiment the electrophoretic particles are released from the electrodes before they are directed to a new position according to the subsequent drive pulse.

Preferably, the preset pulse is of opposite polarity to the polarity of the pulse of the drive signal.

In an embodiment of claim 5 a preset signal consisting of an even number of preset pulses of opposite polarity can be generated for minimising the DC component and the visibility of the preset pulses of the display device. Two preset pulses, one with positive polarity and one with negative polarity will minimize the power dissipation of the display device within this mode of operation.

In an embodiment as specified in claim 7 the particles are present in a fluid between the substrates. Alternatively, it is possible that the particles are present in a microcapsule.

In an embodiment as specified in claim 8 the surface of the substrate comprising the third electrode is provided with hydrofobic, for example a layer of tetrafluorethylene. This provides a slippy layer so that the particles attracted to this substrate by the potential of the third electrode are distributed more homogeneously.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

5 In the drawings:

Fig.1 shows diagrammatically a portion of a display device,

~~Fig.2 shows a pixel of an electrophoretic display device in which different~~
greyvalues or intermediate optical state have been realized,

10 Fig.3 shows electrical field lines in a pixel of an electrophoretic display device,

Fig. 4 shows 4 prepulses preceding a data signal for supplying to a pixel electrode of an electrophoretic display device and

Fig. 5 shows a pixel of an electrophoretic display device provided with micro capsules comprising charged electrophoretic particles.

15

The Figures are schematic and not drawn to scale, and, in general, like reference numerals refer to like parts.

20 Fig. 1 diagrammatically shows an electric equivalent of a part of display device 1 to which the invention is applicable. It comprises a matrix of pixels 10 at the area of crossings of row or selection electrodes 7 and two column or data electrodes 6,6'. The row electrodes are consecutively selected by means of a row driver 4, while the column electrodes 1,1' to n, n' are provided with data via a data register 5. To this end, the incoming data 2 are first processed, if necessary in a processor 11. Mutual synchronisation between the row
25 driver 4 and the data register 5 takes place via drive lines 8.

30 Drive signal from the row driver select the picture electrodes via thin-film transistors (TFTs) 9,9' whose gate are electrically connected to the row electrodes 7 and whose source electrodes 21 are electrically connected to the column electrodes 6,6' respectively. The signal at the first column driver 6 is transferred to the first picture electrode via the TFT 9. The signal at the second column driver 6' is transferred to the second picture electrode via the TFT 9'. The third picture electrode if the pixel 10 is connected to ground, for example, by means by one or more counter electrodes. In the example of Fig.1 such TFT's 9, 9' are shown diagrammatically for only one pixel 10.

Fig.2A shows a pixel comprising a first substrate 11, for example a glass or a synthetic material, provided with the third electrode 7, a second, transparent substrate 12 provided with a first electrode 6. The pixel is filled with an electrophoretic medium, for example, a white fluid containing positively charged black particles 14 and negatively charged black particles 14'. The second, transparent substrate further comprises a second electrode 6' so as to realize intermediate optical states via electric voltages across the second electrode 6'. The voltage across this third switching electrode 6' influence the switching behaviour between the two optical states.

For example, in Fig.2A, a first optical state is created. Thereto, the third electrode 7 is connected to ground, while one of the first and second electrodes 6 is connected to a first voltage $+V_1$ and the other one of the first and the second electrode 6' is connected to a second voltage V_2 , whereby $V_1 > V_2 > 0$, the black positively charged particles 14 move towards the electrode at the lowest potential, in this case, the third switching electrode 7. The black negatively charged particles 14' move towards the electrode at the highest potential in this case the first electrode 6 and are present in the area directly under the first electrode 6. Viewed from the viewing direction 15, the pixel now has substantially the color of the fluid 13, except for the portion near the first electrode 6, which pixel color is near white in this example. An extreme optical state is realized with the example in Fig.2B. In Fig. 2B the third electrode 7 is connected to ground, while both the first and second electrodes 6,6' are connected to a voltage $-V$. The positively charged, black particles 14 move towards the lowest potential, in this case towards the potential plane defined between the first and second electrodes 6,6' parallel to and alongside of the first substrate 12 and the negatively charged black particles 14' move towards the highest potential in this case towards the potential plane defined by the third electrode 7. Viewed from the viewing direction 15, the pixel now has the color of the black particles 14. An similar optical state arises in case the first and second electrodes 6,6' are connected to a voltage $+V$ and the third electrode 7 is connected to ground. The negatively charged, black particles 14' move to towards the highest potential, in this case to the potential plane parallel and alongside of the first substrate 12 and the positively charged, black particles 14 move towards the lowest potential in this case towards the potential plane defined by the third electrode 7. When viewed from the viewing direction 15, the pixel also has the color of the black particles.

In Fig.2C, in order to create intermediate optical states the first electrode 6 is connected to a first voltage $+V_1$, the second electrode 6' is connected to a third voltage $+V_3$ whereby $V_1 > V_3 > 0$ and $V_3 < V_2$, and the third electrode 7 is connected to ground. The

positively charged, black particles 14 move towards the lowest potential, in this case an area around the third electrode 7. The negatively charged, black particles 14' move towards an area around the first electrode 6. Viewed from the direction 15, the pixel has now partly the color of the black particles and partly the color of the white fluid. A grey hue is thereby
5 obtained. By variation of the magnitude of the voltage V_3 supplied to the second electrodes 6' different grey scales can be obtained. Fig 3 shows potential lines for 4 possible

~~combinations of voltages across the electrodes 6,6' and 7 and arrows 16 diagrammatically~~

showing the forces exerted on positively charged particles. In this way a first image having a first grey hue can be displayed on the display. A consecutive second image having a second
10 grey hue is displayed by connecting the first electrode 6 to a negative first voltage $-V_1$ and the second electrode 6' to a negative voltage $-V_3$, whereby $V_1 < V_3 < 0$, while the third electrode 7 remains connected to ground. In this case the positively charged particles 14 move towards the lowest potential, in this case an area near the first electrode 6. The negatively charged particles 14' move towards an area near the third electrode 7, a new grey
15 hue is thus obtained. The amount of black particles 14 present under the substrate 12, and thus the grey hue, depends from the magnitude of the voltages V_1 , V_3 on the first and second electrode 6,6'. A next consecutive image is displayed by connecting the first electrode 6 again to a positive voltage $+V_1$ and the second electrode 6' again to a positive voltage $+V_3$. Each further consecutive image is displayed by alternating the polarity of the voltages V_1 ,
20 V_3 supplied to the first and second electrodes 6,6' respectively with respect to the third electrode 7. An advantage of this display compared to conventional electrophoretic displays is that a consecutive image can be displayed without applying a reset pulse which releases all particles 14,14' from the first substrate 12. In this way a temporary blanking of the display screen is prevented.

25 Preferably, before each new image a small number of prepulses are supplied to the first and second electrode 6,6' preceding the data pulses V_1, V_3 in order to improve the response time. Fig 4 shows a combination of four prepulses 40 and data pulses $V_n, V_{n+1}, V_{n+2}, V_{n+3}$ supplied to one or both of the electrodes 6,6' of the pixel 10. The magnitude and duration of the prepulses 40 supplied to the first electrode 6 are associated with an energy
30 sufficient for releasing the electrophoretic particles 14,14' in a first area near the first electrode 6 but too low to move them to an area near the third electrode 7. Preferably, the polarity of the last prepulse 40 is opposite to that of the voltage V_1, V_3 supplied to the first and second electrodes 6,6'. Alternatively, the prepulses 40 can be supplied to the third electrode 7 before the voltage V_1, V_2 are supplied to the electrode 6,6'.

The substrates 11,12 may be provided with a hydrofobic layer, for example tetrafluorethylene to prevent sticking of the charged particles 14,14' to the substrates.

Alternatively, the particles can be encapsulated in micro-capsules as described in "Micro-encapsulated Electrophoretic Materials for Electronic Paper Displays, 20th IDRC conference, pp.84-87 (2000)". The electrophoretic medium, the fluid comprising the positively charged particles 14 and the negatively charged particles 14', is now present in microcapsules 16 in a transparent substrate or binder.

Fig. 5A and 5B shows a cross-section 50 of a portion of the display device contained two micro-capsules 16, the third electrode 7 is again connected to ground, while the first and second electrodes 6,6' are connected to a voltage V1, V2 respectively. The size L of micro-capsules 16 in a lateral direction is approximately equal as the distance between the first and second electrodes 6,6'.

It will be obvious that many variations are possible within the scope of the invention without departing from the scope of the appended claims.

16.10.2002

CLAIMS:

EPO - L
18.10.2002
(108)

1. A display device for displaying information comprising a plurality of display elements with an electrophoretic medium, comprising two groups of electrophoretic particles, one group of positively charged electrophoretic particles and one group of negatively charged particles and the color of the electrophoretic particles of the first group is equal to the color of the electrophoretic particles of the second group,
- 5 a first electrode, a second electrode and a third electrode associated with each display element for receiving a drive signal, and
- control means for supplying, in correspondence with the information to be displayed, the drive signal to the electrodes for realizing intermediate optical states.
- 10
2. An electrophoretic display device as claimed in claim 1 wherein the information to be displayed comprises subsequent images and the control means is able to generate a drive signal such that the voltage difference between the first, second electrode and the third electrode respectively is alternately positive and negative synchronously with the display of each subsequent image.
- 15
3. An electrophoretic display device as claimed in claim 1 wherein the control means are further arranged for supplying a preset signal before the drive signal comprising a preset pulse associated with an energy sufficient for releasing the electrophoretic particles from a first position near one of the electrodes on the substrates but too low to reach a second position near one of the other electrodes on the substrates.
- 20
4. An electrophoretic display device as claimed in claim 3 wherein the preset signal is supplied to one of the first and second electrodes.
- 25
5. An electrophoretic display device as claimed in claim 4 wherein the control means being further arranged for generating the preset pulse with a negative or positive polarity and the control means being further arranged for generating the drive signal

comprising a pulse with a positive or negative pulse, whereby the polarity of the preset pulse is opposite to the polarity of the pulse of the drive signal.

6. An electrophoretic display device as claimed in claim 3 wherein the preset
5 signal is supplied to the third electrode.

7. ~~An electrophoretic display device as claimed in claim 1 wherein the~~
electrophoretic medium is present between two substrates one of which comprises the first
and second electrode, and the other comprises the third electrode.

10

8. An electrophoretic display device as claimed in claim 7 wherein the surface of
the substrate comprising the third electrode is provided with a hydrofobic layer.

9. An electrophoretic display device as claimed in claim 1 wherein the
15 electrophoretic medium is present in a micro-capsule.

ABSTRACT:

EPO -
18.10.2002
(108)

The invention relates to a display device for displaying information comprising a plurality of display elements with an electrophoretic medium,

a first electrode, a second electrode and a third electrode associated with each display element for receiving a drive signal, and control means for supplying, in
5 correspondence with the information to be displayed, the drive signal to the electrodes for realizing intermediate optical states. In order to omit reset pulses which cause a temporary blanking of the display device, the electrophoretic medium of the display device comprises two groups of electrophoretic particles, one group of positively charged electrophoretic particles and one group of negatively charged particles and the color of the electrophoretic
10 particles of the first group is equal to the color of the electrophoretic particles of the second group.

Fig. 2

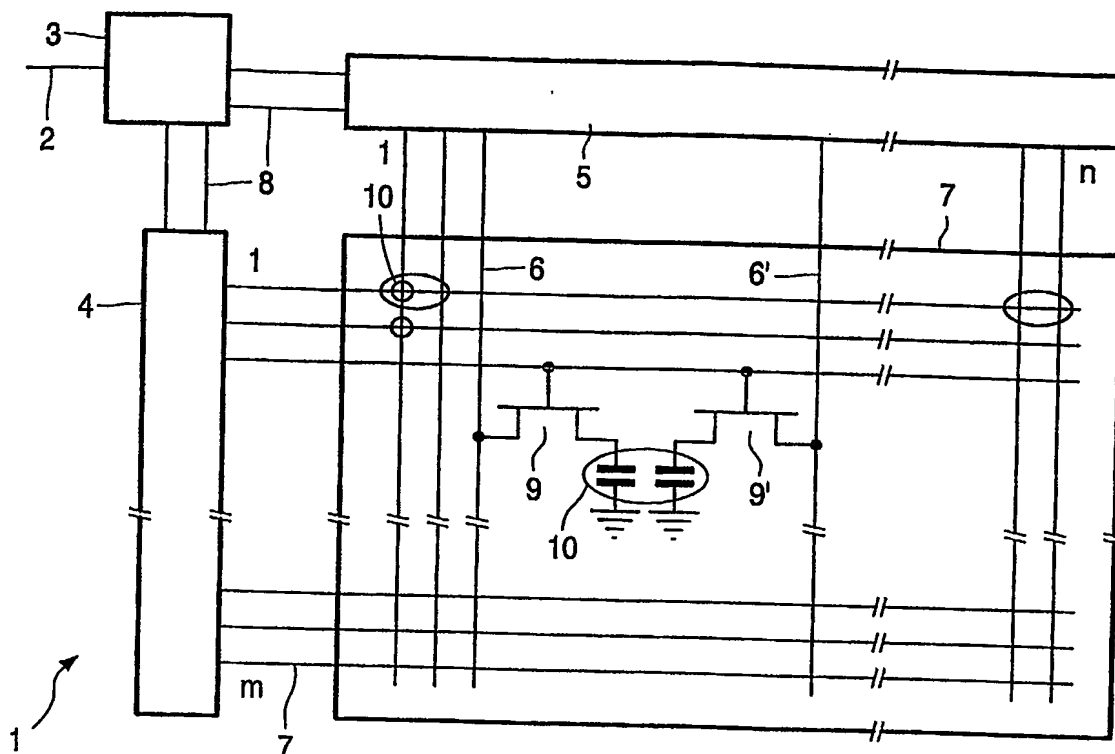


FIG. 1

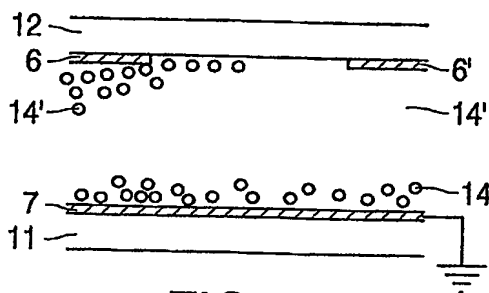


FIG. 2A

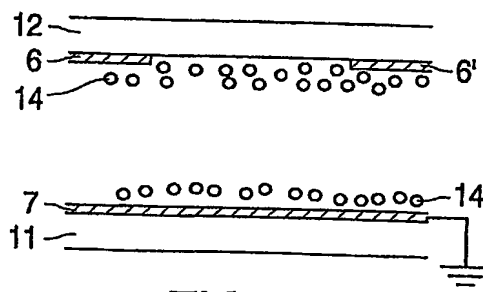


FIG. 2B

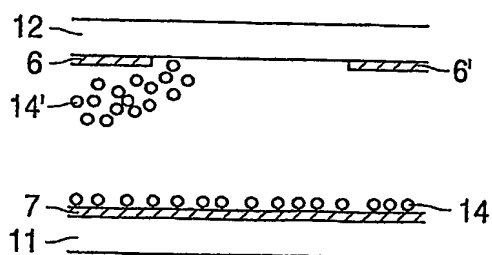
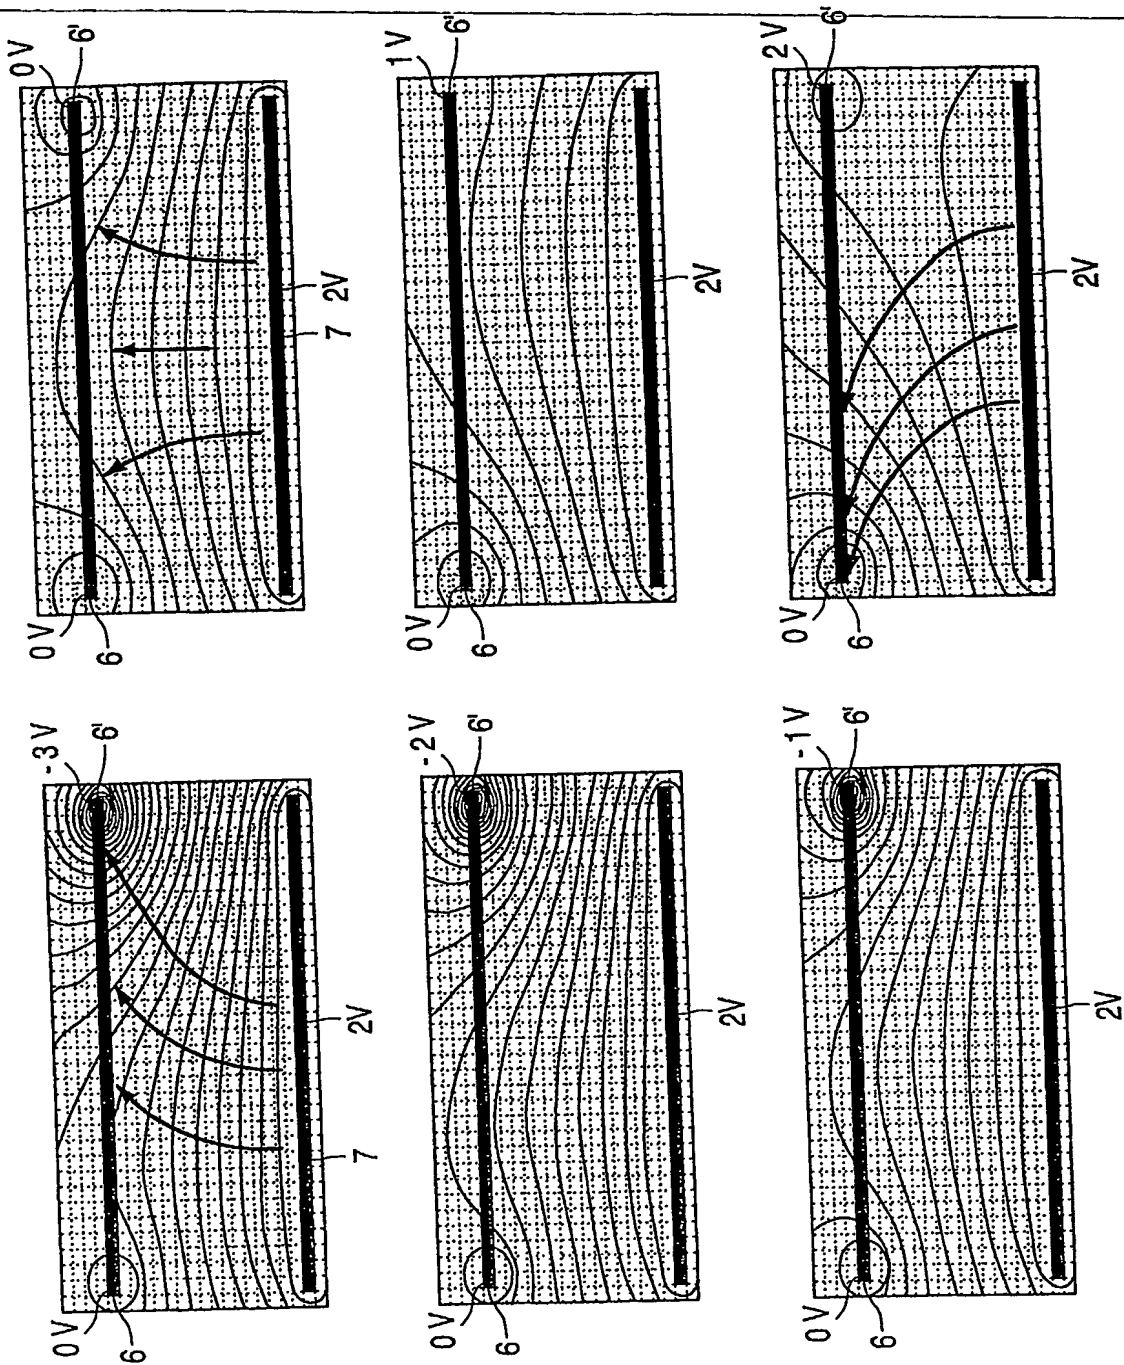


FIG. 2C

FIG. 3



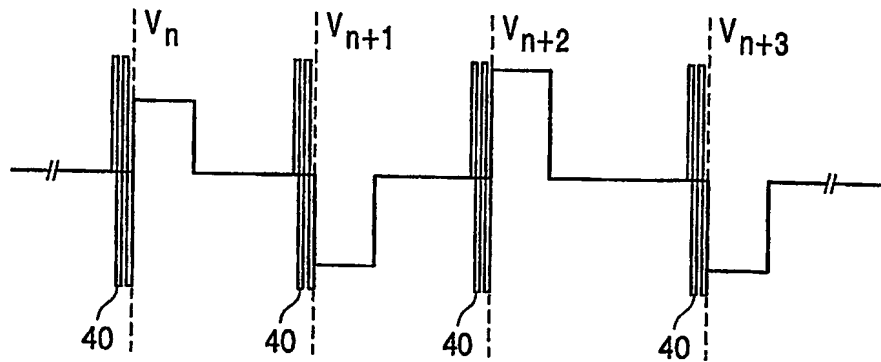


FIG. 4

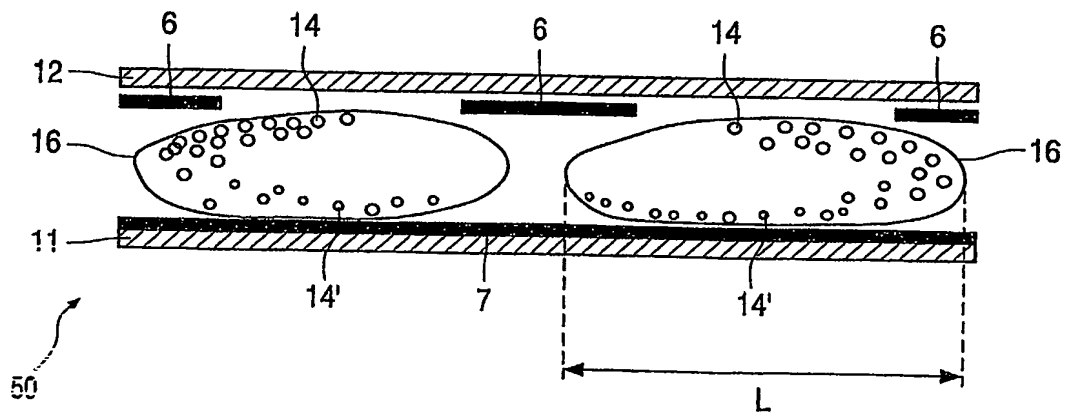


FIG. 5

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.